

General RAD Description



The entire family of RAD models interface with HAL or Mongoose, for digital conversion at the wall. Each converts analog audio to and/or from 24-bit, 48 kHz digital audio. Shielded CAT 5e (or better) cable and termination transport four digital audio channels – two channels each direction – as well as power, ground and a communications channel, with status indicators at each RAD, HAL, EXP or Mongoose unit, and in Halogen or Tracker software. The host HAL or Mongoose auto-checks the CAT 5 crimp and verifies audio. All RADs are both “location-aware” and hot-swappable with 500-foot homerun connections (66% farther than Ethernet). Light sensors dim the RAD indicators in dark rooms. Labels can be made and printed from Halogen or Tracker software.

RAD1

A RAD1 provides two professional quality microphone inputs on XLR connectors. 24 V phantom power can be activated for each microphone in software. Euroblock connections on the back of the RAD allow a hard-wired mic input or for paralleling the mic jacks.

The RAD1 mounts in a standard 2-gang US electrical box. It is available in white, ivory, or black, with a matched Decora™ plate cover included. Order model RAD1W for white, RAD1I for ivory, and RAD1B for black.

Euroblock connectors to use if paralleling microphone jacks

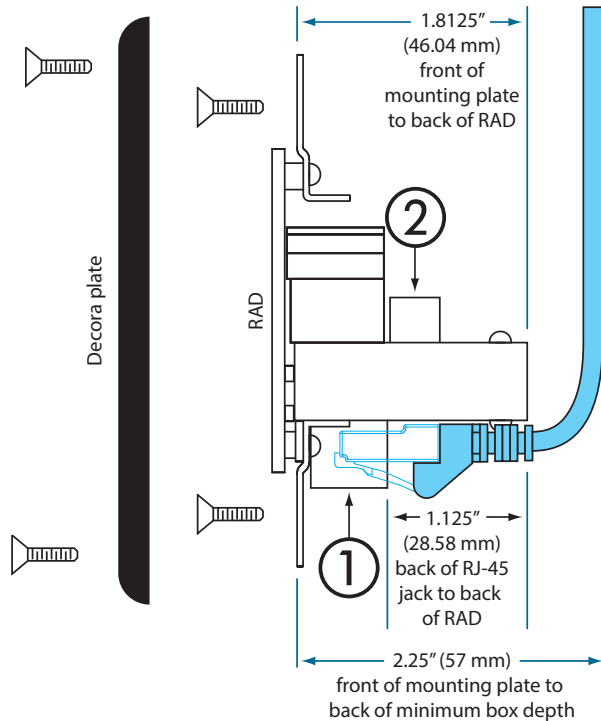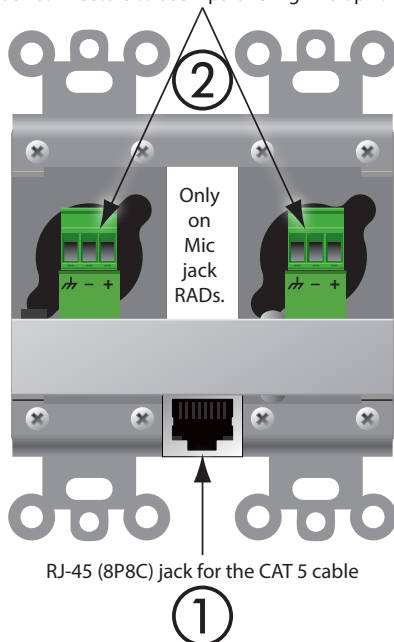

RAD Specifications

Parameter	Specification	Limit	Units	Conditions/Comments
Cable Length	500 feet / 153 meters			Shielded CAT 5e or better.
Signal Indicator	-50	typ.	dBFS	Unbalanced / balanced output, green LED, peak-reading
Overload Indicators	-0.5	typ.	dBFS	Unbalanced / balanced output, red LED, peak-reading
Microphone Input Specs (Both XLR & Euro jacks)				
Input Impedance	2.16 k	1%	Ω	Balanced, 1.08 k + 1.08 k
Max. Input Level	-17	min.	dBu	Balanced, Gain = 26 dB, <1% THD
Equivalent Input Noise	-121	typ.	dBu	20 kHz BW, $R_s = 150 \Omega$, Gain = 26 dB
Dynamic Range	98	typ.	dB	re: 0 dBFS, 20 kHz BW, A-weighted, Gain = 26 dB
CMRR	-70	typ.	dB	$R_s = 150 \Omega$, 1 kHz, Gain = 26 dB
Frequency Response	30 to 20k	typ.	Hz	+0, -3dB, At All Gain Settings
THD+Noise	0.010% typ.	@ 1 kHz, 20 kHz BW, $R_s = 150 \Omega$, Output = -6 dBFS, Gain = 26 dB		
Gain Range	26 to 60	typ.	dB	In 1 dB Steps
Phantom Power	+24	4%	V	15 mA Max.
Impedance	1.21 k	1%	Ω	Each Leg
Unit				
Conformity	CE, FCC			
Size	4.1"H x 3.1"W x 2.1"D			10.4 x 7.9 x 5.4 cm
...Weight	4.7 oz			133 g
.....Shipping	11 oz			312 g