

Transform Switch Removal

1. Remove the three fader knobs by gently pulling up.
2. Remove the four screws securing the cover plate (see Figure 1) with a #1 Phillips screwdriver.
3. Carefully remove cover plate.
4. Remove the screws (shown in Figure 2) with a #1 screwdriver, while holding the switch in place.
5. Lower switch into unit and bring through hole in panel.
6. Remove ribbon cable from the switch assembly.

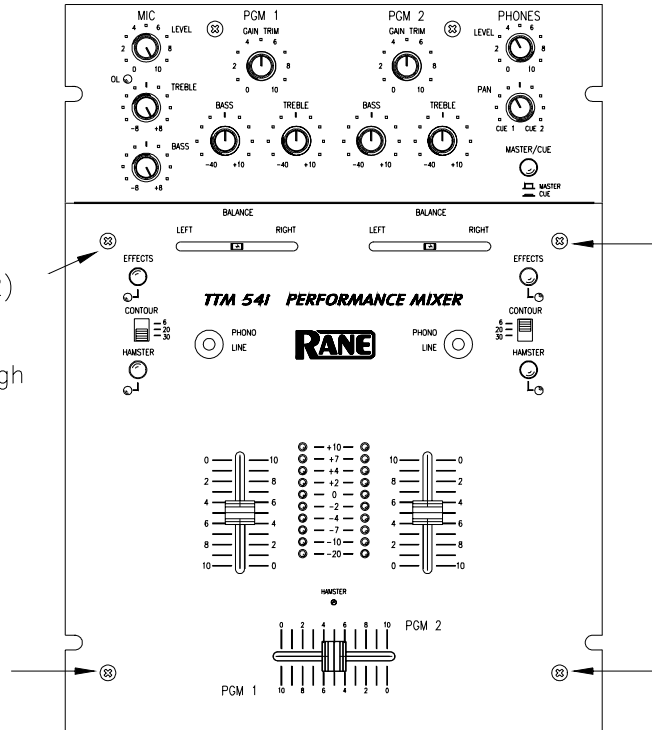


Figure 1

Transform Switch Installation

1. Plug ribbon cable onto switch assembly.
2. Feed replacement switch carefully through hole.
3. While holding switch in place, install two 2.5mm silver screws supplied with the replacement switch.
4. Tighten securely with a #1 phillips screwdriver.
4. Carefully place the cover plate back onto unit.
5. Install the four new mounting screws (black) supplied with the replacement fader. (see Figure 1).
6. Place the three knobs back onto the faders.

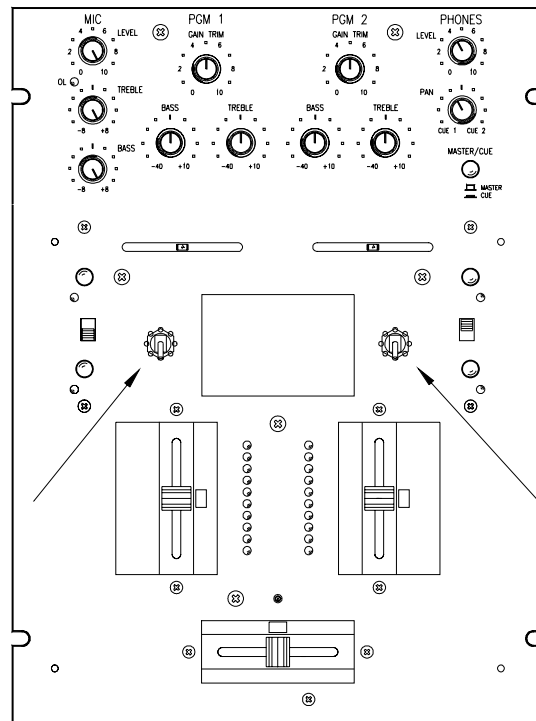


Figure 2