


RAD26

ONE ROOM RAD REMOTE

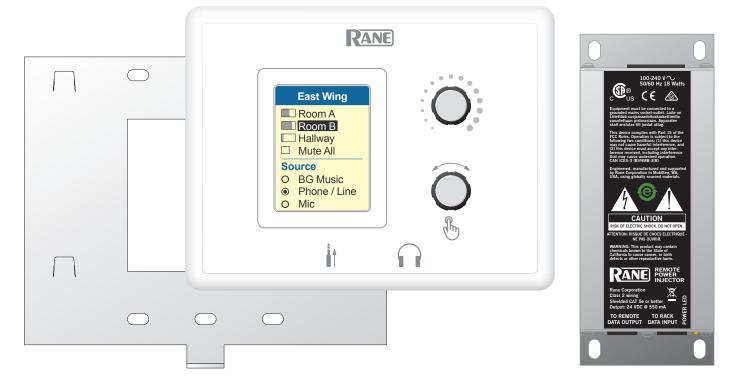

See the HAL Installation Manual for all RAD instructions and warranty information.

The HAL Installation and Design Manuals, data sheets with specifications, Halogen software and help files, graphics and CAD files, and system applications are available at rane.com/hal.


FCC Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Changes or modifications not expressly approved by Rane Corporation could void the user's authority to operate the equipment.


CAN ICES-3 (B)/NMB-3(B)



Shielded CAT5e or better cables are required in order to comply with the FCC Rules part 15 limits for a Class B digital device.

Warning

This product may contain chemicals known to the State of California to cause cancer, or birth defects or other reproductive harm.



EU Declaration of Conformity

Product Model: RAD26 and Remote Power Injector Serial Numbers: 900000 – 999999 Product Type: Professional Audio Signal Processing

Manufacturer: Rane Corporation Address: 10802 47th Avenue West, Mukilteo WA 98275-5000 USA

This declaration is issued under the sole responsibility of Rane Corporation.





The object of the declaration described above is in conformity with the relevant Union harmonisation legislation:2014/30/EUThe Electromagnetic Compatibility Directive2012/19/EUThe Waste Electrical and Electronic Equipment Directive2011/65/EUThe Restriction of Hazardous Substances Directive

References to the relevant harmonised standards used in relation to which conformity is declared:EN55103-1:2009/AM1:2012Compatibility of professional electronic A/V apparatus emissions.EN55103-2:2009Compatibility of professional electronic A/V apparatus immunity.EN50581:2012Technical documentation for RoHS assessment of electronic products.

Additional Information: Environment E2 CE mark first affixed in 2015

In order for the customer to maintain compliance with these regulations, high quality shielded cable must be used for interconnection to other equipment. No changes or modification of the equipment, other than that expressly outlined by the manufacturer, are allowed. The user of this equipment shall accept full responsibility for compliance with Union harmonisation legislation in the event that the equipment is modified without written consent of the manufacturer.

EN55103-2 Immunity Results:	THD+N: 4 dBu, 400 Hz, BW 20 Hz - 20 kHz		
Test Description	RAD26 Results	Remote Power Injector Results	Conditions
RF Electromagnetic Fields Immunity			
80 MHz - 1000 MHz, 1 kHz AM, 80% depth, 3V/m	<-61 dB	No Susceptibility	
1400 MHz - 2700 MHz, 1 kHz AM, 80% depth, 3V/m	<-62 dB	No Susceptibility	
Conducted RF Disturbances Immunity			
150 kHz - 80 MHz, 1 kHz AM, 80% depth, 3V rms	<-60 dB	No Susceptibility	150 kHz - 7.6 MHz
	<-42 dB	No Susceptibility	7.6 MHz - 8.4 MHz
	<-60 dB	No Susceptibility	8.4 MHz - 8.8 MHz
	<-53 dB	No Susceptibility	8.8 MHz - 11.2 MHz
	<-60 dB	No Susceptibility	11.2 MHz - 80 MHz
Magnetic Fields Immunity			
50 Hz - 10 kHz, 3.0 - 0.3 A/m	<-67 dB	No Susceptibility	
Common Mode Immunity (Signal Ports)			Bandpass re: 4 dBu, 1/3-octave
50 Hz - 10 kHz, -20 dBu	<-73 dB	No Susceptibility	-
Common Mode Immunity (Data Ports)			
50 Hz - 10 kHz, -20 dBu	<-63 dB	No Susceptibility	
Signed for and on behalf of: Rane CorporationPlace of issue: Mukilteo WA USADate of issue: December 8, 2015Name: Greg FrederickFunction: Compliance Engineer		Signature:	M